

▼ Single Core Hook Up Cable

18AWG 7.5A Auto Hook Up Handy Reels



Cat. No.	Colour	Length
W 2410	Red	10m
W 2411	Black	10m
W 2412	Red	30m
W 2413	Black	30m

Tinned for corrosion resistance. Ideal for auto & marine wiring jobs. Convenient mini-reels.

Size: 1x 24/0.20
 Current rating: 7.5A
 Dimensions: 2.25mm
 Conductor area: 0.75mm² (=18AWG)
 Resistance: 0.0228Ω/m
 Jacket material: PVC
 Temperature rating: 105°C

Price Per	1 Roll	4 Rolls	6 Rolls
10m Roll	13.95	12.55	11.15
30m Roll	27.00	25.00	23.50

17AWG 10A Auto Hook Up Handy Reels




Cat. No.	Colour	Length
W 2414	Red	10m
W 2415	Black	10m
W 2416	Red	30m
W 2417	Black	30m

Tinned for corrosion resistance. Ideal for auto & marine wiring jobs. Convenient mini-reels.

Size: 1x 32/0.20
 Current rating: 10A
 Dimensions: 2.55mm
 Conductor area: 1.01mm² (=17AWG)
 Resistance: 0.0174Ω/m
 Jacket material: PVC
 Temperature rating: 105°C

Price Per	1 Roll	4 Rolls	6 Rolls
10m Roll	16.50	14.95	13.25
30m Roll	31.50	28.50	25.25

16AWG 15A Auto Hook Up Handy Reels

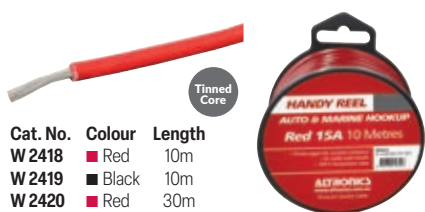


Cat. No.	Colour	Length
W 2418	Red	10m
W 2419	Black	10m
W 2420	Red	30m
W 2421	Black	30m

Tinned for corrosion resistance. Ideal for auto & marine wiring jobs. Convenient mini-reels.

Size: 1x 26/0.254
 Current rating: 15A
 Dimensions: 2.7mm
 Conductor area: 1.32mm² (=16AWG)
 Resistance: 0.014Ω/m
 Jacket material: PVC
 Temperature rating: 105°C

Price Per	1 Roll	4 Rolls	6 Rolls
10m Roll	19.00	17.00	15.00
30m Roll	37.95	34.25	30.50

11AWG 30A Auto Hook Up Handy Reels

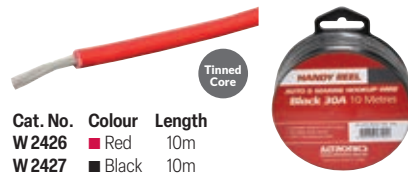

Cat. No.	Colour	Length
W 2426	Red	10m
W 2427	Black	10m

Tinned for corrosion resistance. Ideal for auto & marine wiring jobs. Convenient mini-reels.

Size: 1x 56/0.30
 Current rating: 30A
 Dimensions: 4.2mm
 Conductor area: 3.96mm² (=11AWG)
 Resistance: 0.0047Ω/m
 Jacket material: PVC
 Temperature rating: 105°C

Price Per	1 Roll	4 Rolls	6 Rolls
10m Roll	43.50	38.50	33.25


Multi-Colour Hobby Wire Pack



6 colour multi pack of 10m hook up cable for projects. Suitable for general purpose low current wiring. Solid core wire suits breadboard jumpers & links.

Price Per	RRP	2+	4+
W 2430 Solid Core 0.5mm	26.95	24.25	21.75
W 2431 Light Duty 7/0.16	19.95	17.95	15.95

26AWG Light Duty

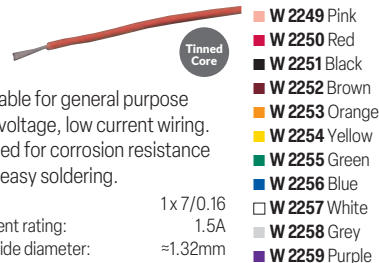


Suitable for general purpose low voltage, low current wiring. Tinned for corrosion resistance and easy soldering.

Size: 1x 7/0.16
 Current rating: 1.5A
 Outside diameter: ≈1.32mm
 Conductor: 0.14mm² (=26AWG)
 Resistance: 0.139Ω/m @ 20°C
 Jacket material: PVC
 Temperature rating: 90°C

Price Per	RRP (m)	Roll	4 Rolls
100m Roll Bulk Mixed OK	0.35	30.00	25.00

21AWG Medium Duty

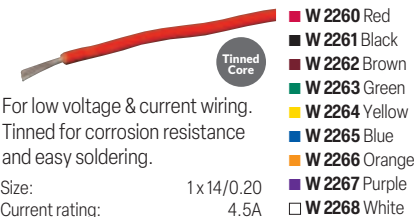


For low voltage & current wiring. Tinned for corrosion resistance and easy soldering.

Size: 1x 14/0.20
 Current rating: 4.5A
 Outside diameter: ≈1.8mm
 Conductor: 0.44mm² (=21AWG)
 Resistance: 0.046Ω/m @ 20°C
 Jacket material: PVC
 Temperature rating: 90°C

Price Per	RRP (m)	Roll	4 Rolls
100m Roll Bulk Mixed OK	0.55	50.00	40.00

18AWG Heavy Duty

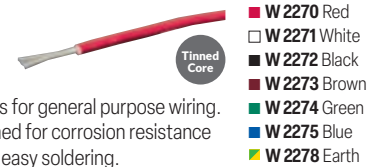


Suits for general purpose wiring. Tinned for corrosion resistance and easy soldering.

Size: 1x 24/0.20
 Rating: 300V AC @ 7.5A
 Outside diameter: ≈2.25mm
 Conductor: 0.75mm² (=18AWG)
 Resistance: 0.0291Ω/m @ 20°C
 Jacket material: PVC
 Temperature rating: 90°C

Price Per	RRP (m)	Roll	4 Rolls
100m Roll Bulk Mixed OK	0.85	75.00	65.00

17AWG Extra Heavy Duty

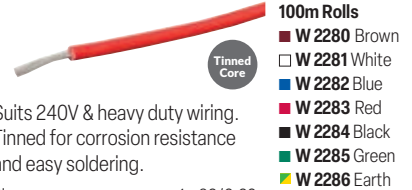


Suits 240V & heavy duty wiring. Tinned for corrosion resistance and easy soldering.

Size: 1x 32/0.20
 Rating: 300V AC @ 10A
 Outside diameter: ≈2.55mm
 Conductor: 1.01mm² (=17AWG)
 Resistance: 18.4Ω/km
 Jacket material: PVC
 Temperature rating: 90°C

Price Per	RRP (m)	Roll	4 Rolls
100m Roll Bulk Mixed OK	1.10	99.00	89.00
300m Roll Bulk Mixed OK	1.00	240.00	195.00

13AWG High Temperature




Higher temperature rated PVC insulator. Designed for internal wiring in equipment with higher temps. Tinned for corrosion resistance & easy soldering.

Size: 1x 50/0.25
 Rating: 300V AC @ 22A
 Outside diameter: ≈3.9mm
 Conductor: 2.45mm² (=13AWG)
 Resistance: 0.0075Ω/m @ 20°C
 Jacket material: PVC
 Temperature rating: 105°C

Price Per	RRP (m)	Roll	4 Rolls
100m Roll Bulk Mixed OK	2.35	210.00	195.00

18AWG Silicone High Temperature

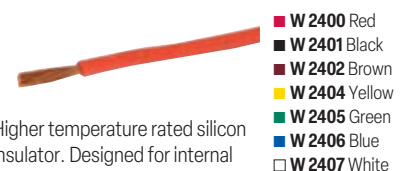

Higher temperature rated silicon insulator. Designed for internal wiring in equipment with higher operating temperatures.

Size: 1x 95/0.1
 Rating: 300V AC @ 10A
 Outside diameter: ≈2.4mm
 Conductor: 0.75mm² (=18AWG)
 Resistance: 0.02Ω/m @ 20°C
 Jacket material: Silicon
 Temperature rating: -50 to 180°C

Price Per	RRP (m)	Roll	4 Rolls
100m Roll Bulk Mixed OK	1.50	135.00	115.00